

# proflex®

## HARDCOURT

### Proflex® Hardcourt is an impervious acrylic tennis surface.

With an excellent appearance as good as any other in the range, the Proflex® Hardcourt acrylic system has no cushioning and comprises one resurfacer coat and three hardwearing colour coats.

An economic court that is still a favourite with many tennis players.

There is a version of Proflex® Hardcourt for each ITF Court Pace class. It is suitable for use in conventional and wheelchair tennis playing.



Whilst Proflex® Hardcourt is designed primarily for tennis the surface is also excellent for Multi Use Games Areas. The slip resistance of the top coat may also be adjusted to meet the requirements of other sports such as netball, 5-a-side football and basketball.

### ITF Pace Classifications

Normally, Proflex® Hardcourt is available in versions that have ITF Pace Classifications of 2, 3 and 4. But, by varying the formulation of the components used in Proflex it is possible to produce surfaces with ITF Pace Classifications of 1(Slow) and 5(Fast) in addition.




### The Environment

The materials used in these surfaces are environmentally friendly, using water-based polymer coatings.

### Colour Range

The standard range of colours comprises those shown here.

Please note that the colours are for illustration only and actual colours may differ considerably from those illustrated

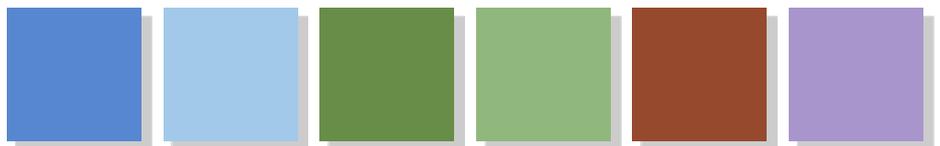

Any other choice of colour can be formulated on request.



Proflex® Hardcourt is a product of Proflex Surfaces Ltd, Surfacing Contractor members of The Sports and Play Construction Association.

---

## Cross-section of Proflex® Hardcourt

①

### Top Coat

A sand-filled, coloured, single pack, water-based acrylic/polyurethane coating, providing texture and additional strength to the surface.

Whilst Proflex® Hardcourt is designed primarily for tennis the surface is also excellent for Multi Use Games Areas. The slip resistance of the top coat may also be adjusted to meet the requirements of other sports such as netball, 5-a-side football and basketball.

②

### Acrylic/PU Base Coat

A sand-filled, coloured, single pack, water-based acrylic/polyurethane coatings, providing texture and additional strength to the surface.

③


### Resurfacer Coat

Economic black acrylic polymer, heavily filled with silica sand to provide a smooth seal over the substrate.

④

### Substrate

Macadam or concrete. Generally built to a gradient of 1:100 to 1:150.

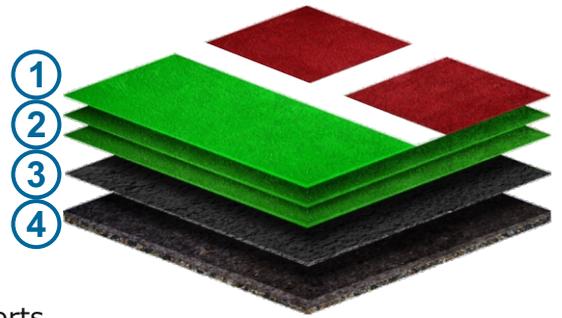

## Maintenance

The maintenance costs are very low and in most cases the court surface will only require a pressure wash every one to two years.

This service can be carried out professionally by First Service Ltd on a routine basis if required.